

2 - IN - 1 SYSTEM
SECURITY & AUTOMATION

IP2 SMS Panel

*SMS Remote Monitoring & Control
With Secured Access*




Secured, Anytime & Anywhere



Secured, Anytime & Anywhere


The IP2 SMS Panel is pre-wired and housed in a sturdy IP55 enclosure, 300x300x150mm, weighing 3kg, wall mounting holes, bottom cable entry and GSM antenna.

Employing SMS Network, I/O status monitoring and control can be done using any GSM mobile phones -- Secured, Anytime & Anywhere !

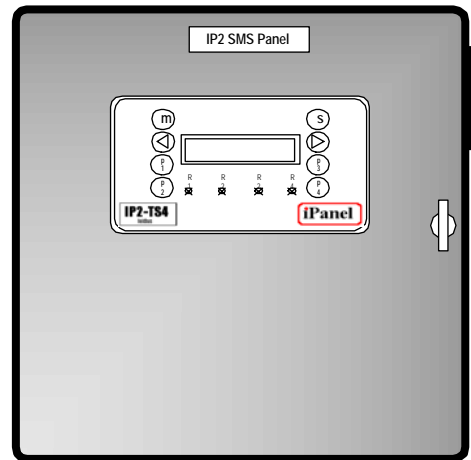

IP2 SMS Panel

Applications

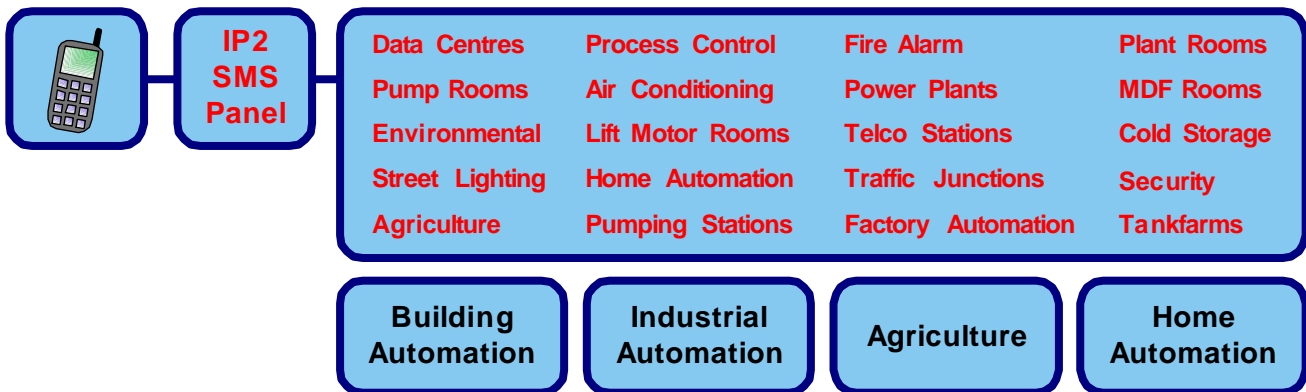

Specifications

- 4 x Opto-Isolated Inputs (12VDC/ 230VAC)
- 4 x Relay Outputs SPDT
- GSM Network Modem and Antenna
- Analog Inputs (0-5VDC) - Optional
- 12VDC Battery & Charger - Optional
- Fieldbus Network - Optional

Features

- Remote Monitoring and Control Using SMS
- Terminated Inputs and Relay Outputs
- Sturdy IP55 housing With Side Antenna
- Door Access Control
- Secured CLI and PW Protection
- 1 Master + 3 Users
- M2M Forwarding
- Text/ Hex Mode

System Requirements

- 12VDC/ 230VAC Supply
- SIM card with SMS Data Plan

Please Contact...

IPanel Pte. Ltd. (RCB: 20-0006429-W)

51 Ayer Rajah Cres #02-01/02, Ayer Rajah Ind. Estate, Singapore 139948
Tel: 65-6872 0344 Fax: 65-6776 7903, 65-6234-2294. Sales@ipanel.com.sg

IPanel Malaysia Sdn. Bhd. (590326-A)

Suite 8.01 Menara Tan & Tan, 207 Jalan Tun Razak, KL 50400 Malaysia.
Tel: 60 3-2163 1111 Fax: 60 3-2166 6533. Sales@ipanel.com.my

A Member of Goldis Family

